CR - 4030504859

SAACO
GENERAL TRADING

SULTAN ALI BIN AHMED AL ASMARI COMMERCIAL - مؤسسة سلطان علي بن أحمد الأسمري التجارية

COMPANY PROFILE





Welcome to SAACO Est, where we specialize in providing a wide array of products tailored to fulfill your diverse requirements. Whether you're seeking essential office supplies, stationery, fire extinguishers, building materials, computer and electronics accessories, cleaning materials, safety products, or machinery parts, we offer a comprehensive selection. Our dedicated team of experts is committed to assisting you in finding precisely what you need, all at competitive prices. Discover how we can support your business – contact us today to explore our complete range of offerings.

Our Services

1

Office Supplies

We offer a variety of office supplies to meet your business needs. From writing instruments to paper products, we have everything you need to keep your office running smoothly.

2

Computer & Accessories

We offer a range of computer and accessories that are perfect for both personal and business use. Our products are of the highest quality and are available at affordable prices.

3

Fire Extinguishers

We provide a wide range of safety materials including fire extinguishers, safety glasses, and hard hats. Our products are designed to keep you and your employees safe on the job.

4

Building Materials

Our wide range of building materials includes everything from lumber to roofing materials. We provide high-quality products at competitive prices.

Our Services

5

Cleaning Materials

We offer a wide range of cleaning materials for both commercial and residential use. Our products are designed to be effective and affordable.

6

Machine & Parts

We offer a wide range of machine and parts for both commercial and industrial use. Our products are of the highest quality and are available at competitive prices.

7

All other items

We can arrange all other
electrical and electronics, printing and design materials, gift items etc with our large supplier base.
Let us know your needs and we will find a solution for you.

SAACO GENERAL TRADING

Sultan Ali Bin Ahmad Al Asmari Commercial Establishment

Product Catalogue

Products supplied by SAACO across Jeddah, Riyadh and Dammam

CONTENTS

01 Lifting, Rigging & Height Safety — p. 05

- Electric Chain Hoist — HHB Series (0.5 t – 35 t) 06
- Manual Chain Block — HSZ-622A 07
- Polyester Webbing Slings — 2 Ply Eye-Eye 08
- Shackles — Anchor & Chain, Bolt & Screw Pin 09
- Full Body Harness & Energy Absorbing Lanyard 13

02 Marine Safety & Accessories — p. 14

- Fire Fighting — Hoses, Hydrant Valves, Couplings & Nozzles
- Navigation & Signalling — Binoculars, Compasses, Clocks & Buoys
- Life Saving — Life Rings, Jackets, Liferafts & Immersion Suits
- Emergency — First Aid, Eye Wash, EEBD & Breathing Apparatus
- Deck & Engine — Pumps, Valves, Anchors, Propellers & Steering
- Rescue — Stretchers, Pilot Ladders, Inflatable Boats & Lockout Kits

03 Packaging Materials — p. 23

- PP Strap, Tarpaulin & Adhesive Tapes
- Corrugated Paper Roll & PVC Corrugated Sheet
- Bubble Wrap & Stretch Film

SAACO GENERAL TRADING

PRODUCT CATALOGUE

01

Lifting, Rigging & Height Safety

Hoists, chain blocks, slings, shackles and fall-protection equipment for safe, certified lifting.

- Electric Chain Hoist — HHB Series (0.5 t – 35 t) 06
- Manual Chain Block — HSZ-622A 07
- Polyester Webbing Slings — 2 Ply Eye-Eye 08
- Shackles — Anchor & Chain, Bolt & Screw Pin 09
- Full Body Harness & Energy Absorbing Lanyard 13

HHB ELECTRIC CHAIN HOIST

HHB型环链电动葫芦 0.5t-35t

- Japan Tech
- Dual braking system ensure for more safe and reliable operation.
- Compact design with light weight.
- Dual-geared driven system enable smoothly driven with low noise.
- High-strength alloy steel components with special heat treatment, avoiding sudden break.

- 日本技术
- 双制动系统
- 结构紧凑，重量轻
- 二级齿轮驱动系统保证低噪音运行
- 高强度合金钢部件，经过热处理，避免脆断



Limit switch ensure safety and reliable operation
限位开关确保操作安全可靠



Electro magnetic brake system
电磁制动



Strong water-proof control handle
强防水控制手柄



HOOK SUSPENSION
吊钩悬挂式

OPTIONAL FEATURES WITH EXTRA COST
选配

- Dual speed
- Overload protection
- Different power supply and frequency
- Schneider electric parts
- FEC chain
- Thermal protection

- 双速
- 过载保护
- 不同的电源配置
- 施耐德电气元件
- 日本FEC起重链条
- 过热保护

3-phase,380V, 50Hz(Single Speed/Dual Speed)
3P,380V,50Hz (单速/双速)

Model 型号	Capacity 额定载荷 t	Standard lift 标准起升高度 m	Test load 试验载荷 kN	Motor Power(kw) 电机功率 Single/Dual 单速/双速	No.of Chain 链条行数	Dia of Chain 链条直径 mm	Lifting Speed (m/min) 起升速度 Single/Dual 单速/双速	Net weight 净重 kg	Extra weight per meter of extra lift 起升高度增加1米增加的重量 kg
HHB-0.5AF	0.5	3	6.25	0.75,0.8/0.27	1	6.3	6.8,6.9/2.3	47	0.81
HHB-1.0AF	1.0	3	12.5	1.5,1.8/0.6	1	7.1	6.6,6.9/2.3	61	1.1
HHB-1.0BF	1.0	3	12.5	0.75,0.8/0.27	2	6.3	3.4,3.5/1.2	52	1.62
HHB-2.0AF	2.0	3	25	3.0,3.0/1.0	1	10	6.6,6.8/2.3	115	2.3
HHB-2.0BF	2.0	3	25	1.5,1.8/0.6	2	7.1	3.3,3.3/1.1	73	2.2
HHB-3.0AF	3.0	3	37.5	3.0,3.0/1.0	1	11.2	5.4,5.4/1.8	122	2.8
HHB-3.0BF	3.0	3	37.5	3.0,3.0/1.0	2	10	4.4,4.5/1.5	131	4.7
HHB-5.0F	5.0	3	62.5	3.0,3.0/1.0	2	11.2	2.8,2.7/0.9	151	5.6
HHB-7.5F	7.5	3	94	3.0,3.0/1.0	3	11.2	1.8,1.8/0.6	266	8.4
HHB-10F	10	6	125	3.0,3.0x2/1.0x2	4	11.2	2.7,2.7/0.9	335	11.2
HHB-15F	15	6	187.5	3.0X2,3.0x2/1.0x2	6	11.2	1.8,1.8/0.6	451	17
HHB-20F	20	6	250	3.0X2,3.0x2/1.0x2	8	11.2	1.4,1.5/0.6	546	22
HHB-25F	25	6	312.5	3.0X2,3.0x2/1.0x2	10	11.2	1.1,1.2/0.4	624	28
HHB-30F	30	6	375	3.0X2,3.0x2/1.0x2	12	11.2	0.9,1.0/0.3	1143	31
HHB-35F	35	6	437.5	3.0X2,3.0x2/1.0x2	16	11.2	0.7,0.7/0.25	1385	44.8

Different power supply is available:240-690v,3p,50hz/60hz
可提供不同电源配置：240-690V,3P,50Hz/60Hz


TOYAMA CHAIN BLOCK




CHAIN BLOCK
HSZ-622A

FEATURES and ADVANTAGES


- Alloy steel components with special heat treatment, avoiding sudden break.
- Automatic Double Pawl Braking System
- Asbestos Free Friction Disc
- Industrial Powder Coating meet RoHS requirement
- 1500 Cycles life test, Meet JBT7334, EN13157, ANSI B30.16, AS1418 Standards




0.5T-2T



3T,5T



10T,15T



20T

Model		622A-0.5	622A-1	622A-1.5		622A-2		622A-3		622A-5		622A-7.5	622A-10		622A-15	622A-20		622A-30
Capacity	tons	0.5	1	1.5	1.5	2	2	3	3	5	5	7.5	10	10	15	20	20	30
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Running test load	KN	7.5	15	22.5	22.5	30	30	45	45	75	75	112.5	150	150	225	300	300	450
Effort required to lift rated load	N	225	300	310	350	300	310	350	370	400	415	415	410	415	420	410*2	410*2	410*2
Diameter of load chain	mm	5	6	7.1	8	6	8	7.1	8	9	10	10	9	10	10	9	10	10
Strands of load chain		1	1	1	1	2	1	2	2	2	2	3	4	4	6	8	8	12
Dimensions (mm)	A	132	152	152	155	152	185	152	155	185	189	189	185	189	194	220	224	274
	B	152	157	180	180	170	207	207	207	267	267	380	380	380	400	440	440	649
	C	315	355	375	375	405	430	500	500	680	680	650	750	750	880	940	940	1100
	D	34	38	48	48	48	48	50	50	57	57	72	80	80	85	106	106	120
	K	27	27	36	36	36	36	38	38	48	48	47	51	51	58	70	70	80
Net weight	kg	8.5	11	13.5	14.5	14.5	17.5	20.5	23	36.5	39.5	44	60	65	102	146	156	246
Packing measurement	cm	24.5x19x18	25x19x19	30.5x21x19		31x20x19	30x23.5x25	34x24x19		49x29x23		47x42x23	47x42x22		97x48x23	80x70x24	80x70x23	80x70x37
Extra weight per metre of Extra lift	kg	1.3	1.6	2	2.3	2.2	2.3	3.2	3.7	4.5	5.3	7.5	8.1	9.7	14	16.2	19.3	28.2

ISO9001:2000

WEBBING SLINGS 2 PLY EYE-EYE



Type
- Double Ply Polyester Webbing Sling with Reinforced Lifting Eyes

Technical Specifications
- Colour coded according to EN 1492-1
- Safety Factor(SF) 7:1

Characteristics
- Low Elongation

Norms
- According to Machinery Directive 2006/42/EC and EN 1492-1



REF. NO.	COLOR	W.L.L. (Kgs)	WIDTH (mm)	WORKING LOAD LIMIT IN Kgs WITH ONE WEBBING SLING				
				STRAIGHT LIFT	CHOKED LIFT	LIFTING AT AN ANGLE β		
						0°- 7°	7°- 45°	45°- 60°
								
				1.0	0.8	2.0	1.4	1.0
DP71/RE/1		1,000	25	1,000	800	2,000	1,400	1,000
DP71/RE/2		2,000	50	2,000	1,600	4,000	2,800	2,000
DP71/RE/3		3,000	75	3,000	2,400	6,000	4,200	3,000
DP71/RE/4		4,000	100	4,000	3,200	8,000	5,600	4,000
DP71/RE/5		5,000	125	5,000	4,000	10,000	7,000	5,000
DP71/RE/6		6,000	150	6,000	4,800	12,000	8,400	6,000
DP71/RE/8		8,000	200	8,000	6,400	16,000	11,200	8,000
DP71/RE/10		10,000	250	10,000	8,000	20,000	14,000	10,000
DP71/RE/12		12,000	300	12,000	9,600	24,000	16,800	12,000

Remarks:
- SF5:1, SF6:1, SF8:1(AS 1353.1) is also available.
- Other width is also available.

⚠ CAUTIONS

- Do not exceed Working Load Limit.
- Prevent shock-loading.
- When selecting a sling, it is very important to consider the angles at which the sling will be used.
- Slings are subject to cutting when lifting items with sharp edges. In this case always use wear sleeves.
- Do not use a damaged sling.
- Never make knots in a sling.
- Never drag a sling from underneath a load that is resting on it.
- Inspect slings weekly or more frequently depending on sling use.
- Always store slings in a cool dry and dark place when they are not in use for prolonged periods.
- Always read and understand the operating instructions before use.

Lifting Eye Types:



1. Flat Eye
2. Reversed Eye
3. Folded Eye 1/2 Width from 1 Side
4. Folded Eye 1/2 Width from 2 Sides
5. Folded Eye 1/3 Width

Bolt Type Anchor Shackles












DESCRIPTION

- Hot - dipped galvanized body.
- All Shackles are individually inspected and tested with proof load.
- Embossed forged marking for WLL, size, CE and KF.

Standard:	BS EN 13889
Material:	Body - forged carbon steel, pin -Alloy steel
FOS:	6:1
Heat treatment:	Quenched and Tempered
Proof load:	At 200 % of WLL
Colour code:	Body - Silver, Pin - Green

Diagram:

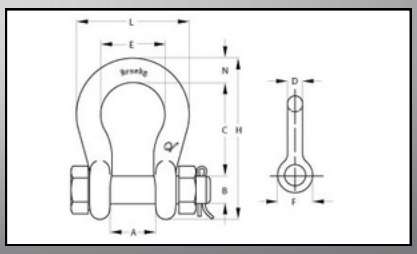

BOLT TYPE ANCHOR SHACKLES SPECIFICATION:

Nominal Size (in)	Working Load Limit (t)	Weight Each (kg)	Dimensions (mm)										Tolerance (+ / - mm)	
			A	B	C	D	E	F	H	L	M	N	C	A
3/16	0.33 ‡	.03	9.7	6.4	22.4	4.9	15.2	14.2	37.3	24.9	32.8	4.85		1.50
1/4	0.5	.05	11.9	7.9	28.7	6.4	19.8	15.5	46.7	32.5	39.6	6.35	1.50	1.50
5/16	0.75	.10	13.5	9.7	31.0	7.9	21.3	19.1	53.0	37.3	46.2	7.85	1.50	1.50
3/8	1	.15	16.8	11.2	36.6	9.7	26.2	23.1	63.0	45.2	55.1	9.65	1.50	1.50
7/16	1.5	.22	19.1	12.7	42.9	11.2	29.5	26.9	74.0	51.5	63.8	11.2	3.30	1.50
1/2	2	.36	20.6	16.0	47.8	12.7	33.3	30.2	83.5	58.5	71.1	12.7	3.30	1.50
5/8	3.25	.62	26.9	19.1	60.5	16.0	42.9	38.1	106	74.5	90.4	17.5	3.30	1.50
3/4	4.75	1.23	31.8	22.4	71.5	19.1	51.0	46.0	126	89.0	105	20.6	3.30	1.50
7/8	6.5	1.79	36.6	25.4	84.0	22.4	58.0	53.0	148	102	122	24.6	6.35	1.50
1	8.5	2.28	42.9	28.7	95.5	25.4	68.5	60.5	167	119	137	26.9	6.35	1.50
1-1/8	9.5	3.75	46.0	31.8	108	28.7	74.0	68.5	190	131	150	31.8	6.35	1.50
1-1/4	12	5.31	51.5	35.1	119	31.8	82.5	76.0	210	146	170	35.1	6.35	1.50
1-3/8	13.5	7.18	57.0	38.1	133	35.1	92.0	84.0	233	162	183	38.1	6.35	3.30
1-1/2	17	8.62	60.5	41.4	146	38.1	98.5	92.0	254	175	196	41.1	6.35	3.30
1-3/4	25	15.4	73.0	51.0	178	44.5	127	106	313	225	246	57.0	6.35	3.30
2	35	23.7	82.5	57.0	197	51.0	146	122	348	253	275	61.0	6.35	3.30
2-1/2	55	44.6	105	70.0	267	66.5	184	145	453	327	345	79.5	6.35	6.35
3	† 85	70	127	82.5	330	76.0	200	165	546	365	384	92.0	6.35	6.35
3-1/2	† 120 ‡	120	133	95.5	372	92.0	229	203	626	419	432	105	6.35	6.35
4	† 150 ‡	153	140	108	368	104	254	229	653	468	451	116	6.35	6.35

Alloy Screw Anchor Pin Shackles












DESCRIPTION

- Hot - dipped galvanized body.
- All Shackles are individually inspected and tested with proof load.
- Embossed forged marking for WLL, size, CE and KF.

Standard:	BS EN 13889
Material:	Body - forged carbon steel, pin -Alloy steel
FOS:	6:1
Heat treatment:	Quenched and Tempered
Proof load:	At 200 % of WLL
Colour code:	Body - Silver, Pin - Green

Diagram:

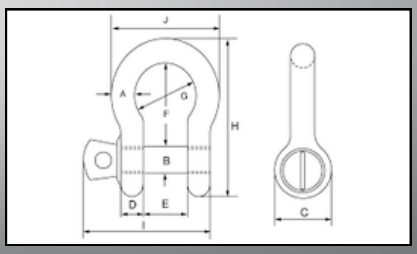

ALLOY SCREW ANCHOR PIN SHACKLES SPECIFICATION:

Nominal Size (in)	Working Load Limit (t)	Weight Each (kg)	Dimensions (mm)											Tolerance (+ / - mm)	
			A	B	C	D	E	F	G	H	L	M	P	C	A
3/8	2	.14	16.8	11.2	36.6	9.65	26.2	23.1	45.2	63.5	6.35	51.5	9.65	3.30	1.50
7/16	2.67	.17	19.1	12.7	42.9	11.2	29.5	26.9	51.5	74.0	7.85	60.5	11.2	3.30	1.50
1/2	3.33	.29	20.6	16.0	47.8	12.7	23.3	30.2	58.5	83.5	9.65	68.5	12.7	3.30	1.50
5/8	5	.63	26.9	19.1	60.5	16.0	42.9	38.1	74.5	106	11.2	85.0	17.5	3.30	1.50
3/4	7	1.02	31.8	22.4	71.5	19.1	51.0	46.0	89.0	126	12.7	101	20.6	6.35	1.50
7/8	9.5	1.53	36.6	25.4	84.0	22.4	58.0	53.0	102	148	12.7	114	24.6	6.35	1.50
1	12.5	2.41	42.9	28.7	95.5	25.4	68.5	60.5	119	167	14.2	129	26.9	6.35	1.50
1-1/8	15	3.09	46.0	31.8	108	29.5	74.0	68.5	131	190	16.0	142	31.8	6.35	1.50
1-1/4	18	4.31	51.5	35.1	119	32.8	82.5	76.0	146	210	17.5	156	35.1	6.35	1.50
1-3/8	21	6.01	57.0	38.1	133	36.1	92.0	84.0	162	233	19.1	174	38.1	6.35	3.30

Screw Pin Chain Shackles












DESCRIPTION

- Hot - dipped galvanized body.
- All Shackles are individually inspected and tested with proof load.
- Embossed forged marking for WLL, size, CE and KF.

Standard:	BS EN 13889
Material:	Body - forged carbon steel, pin -Alloy steel
FOS:	6:1
Heat treatment:	Quenched and Tempered
Proof load:	At 200 % of WLL
Colour code:	Body - Silver, Pin - Green

Diagram:

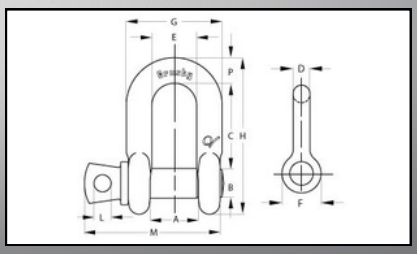

SCREW PIN CHAIN SHACKLES SPECIFICATION:

Nominal Size (in)	Working Load Limit (t)	Weight Each (kg)	Dimensions (mm)										Tolerance (+/- mm)	
			A	B	C	D	E	F	G	K	L	M	G	A
1/4	0.5	.05	11.9	7.85	6.35	6.35	24.6	15.5	22.4	40.4	4.85	35.1	1.50	1.50
5/16	0.75	.08	13.5	9.65	7.85	7.85	29.5	19.1	26.2	48.5	5.60	42.2	1.50	1.50
3/8	1	.13	16.8	11.2	9.65	9.65	35.8	23.1	31.8	58.5	6.35	51.5	3.30	1.50
7/16	1.5	.20	19.1	12.7	11.2	11.2	41.4	26.9	36.6	67.5	7.85	60.5	3.30	1.50
1/2	2	.27	20.6	16.0	12.7	12.7	46.0	30.2	41.4	77.0	9.65	68.5	3.30	1.50
5/8	3.25	.57	26.9	19.1	15.7	16.0	58.5	38.1	51.0	95.5	11.2	85.0	3.30	1.50
3/4	4.75	1.20	31.8	22.4	20.6	19.1	70.0	46.0	60.5	115	12.7	101	6.35	1.50
7/8	6.5	1.43	36.6	25.4	24.6	22.4	81.0	53.0	71.5	135	12.7	114	6.35	1.50
1	8.5	2.15	42.9	28.7	25.4	25.4	93.5	60.5	81.0	151	14.2	129	6.35	1.50
1-1/8	9.5	3.06	46.0	31.8	31.8	28.7	103	68.5	91.0	172	16.0	142	6.35	1.50
1-1/4	12	4.11	51.5	35.1	35.1	31.8	115	76.0	100	191	17.5	156	6.35	3.30
1-3/8	13.5	5.28	57.0	38.1	38.1	35.1	127	84.0	111	210	19.1	174	6.35	3.30
1-1/2	17	7.23	60.5	41.4	41.1	38.1	137	92.0	122	230	20.6	187	6.35	3.30
1-3/4	25	12.1	73.0	51.0	54.0	44.5	162	106	146	279	25.4	231	6.35	3.30
2	35	19.2	82.5	57.0	60.0	51.0	184	122	172	312	31.0	263	6.35	3.30
2-1/2	55	32.5	105	70.0	66.5	66.5	238	145	203	377	35.1	330	6.35	6.35

Bolt Type Chain Shackles












DESCRIPTION

- Hot - dipped galvanized body.
- All Shackles are individually inspected and tested with proof load.
- Embossed forged marking for WLL, size, CE and KF.

Standard:	BS EN 13889
Material:	Body - forged carbon steel, pin -Alloy steel
FOS:	6:1
Heat treatment:	Quenched and Tempered
Proof load:	At 200 % of WLL
Colour code:	Body - Silver, Pin - Green

Diagram:

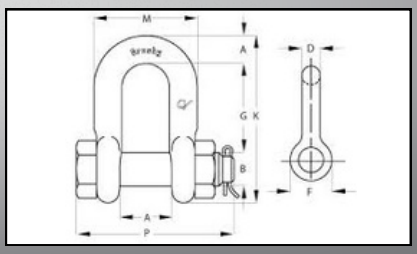

BOLT TYPE CHAIN SHACKLES SPECIFICATION:

Nominal Size (in)	Working Load Limit (t)*	Weight Each (kg)	Dimensions (mm)									Tolerance (+ / - mm)	
			A	B	D	F	G	K	M	P	R	G	A
1/4	0.5	.06	11.9	7.9	6.4	15.5	19.1	40.4	24.6	39.6	6.35	1.50	1.50
5/16	0.75	.10	13.5	9.7	7.9	19.1	25.4	48.5	29.5	46.2	7.85	1.50	1.50
3/8	1	.15	16.8	11.2	9.7	23.1	31.0	58.5	35.8	55.0	9.65	3.30	1.50
7/16	1.5	.22	19.1	12.7	11.2	26.9	36.1	67.5	41.1	63.5	11.2	3.30	1.50
1/2	2	.34	20.6	16.0	12.7	30.2	41.4	77.0	46.0	71.0	12.7	3.30	1.50
5/8	3.25	.67	26.9	19.1	16.0	38.1	51.0	95.5	58.5	89.5	16.0	3.30	1.50
3/4	4.75	1.14	31.8	22.4	19.1	46.0	60.5	115	70.0	103	20.6	6.35	1.50
7/8	6.5	1.74	36.6	25.4	22.4	53.0	71.5	135	81.0	120	24.6	6.35	1.50
1	8.5	2.52	42.9	28.7	25.4	60.5	81.0	151	93.5	135	25.4	6.35	1.50
1-1/8	9.5	3.45	46.0	31.8	28.7	68.5	91.0	172	103	150	31.8	6.35	1.50
1-1/4	12	4.90	51.5	35.1	31.8	76.0	100	191	115	165	35.1	6.35	1.50
1-3/8	13.5	6.24	57.0	38.1	35.1	84.0	111	210	127	183	38.1	6.35	3.30
1-1/2	17	7.72	60.5	41.4	38.1	92.0	122	230	137	196	41.1	6.35	3.30
1-3/4	25	14.2	73.0	51.0	44.5	106	146	279	162	230	54.0	6.35	3.30
2	35	21.2	82.5	57.0	51.0	122	172	312	184	264	60.0	6.35	3.30
2-1/2	55	38.6	105	70.0	66.5	145	203	377	238	344	66.5	6.35	6.35
3	† 85	56	127	82.5	76.0	165	216	429	279	419	89.0	6.35	6.35

LIFT SAFETY

TECHNICAL CATALOGUE

	
FULLBODY HARNESS **SL01**	**ENERGY ABSORBING LANYARD** **SLL 02**

TECHNICAL SPECIFICATIONS

Full Body Harness:-

- Webbing Made of High quality Dope dyed polyester yarn
- Fall indicator to stop reuse of harness after a major fall
- Dual Color scheme for easy identification
- Adjustable shoulder, chest and thigh straps
- Ideally positioned sit strap for extended comfort
- High quality alloy steel, zinc plated metal components, free from any sharp edges.
- Webbing is 44 mm wide with a Breaking strength of 23 kN
- CE Certified to EN 361

Energy Absorbing Lanyard

- Webbing Made of High quality Dope dyed polyester yarn
- Screw locking karabiner at one end and two scaffolding hooks at the other end
- Webbing is 44 mm wide with a Breaking strength of 23 kN
- Length 1.8 mtr from karabiner to scaffolding hook
- CE Certified to EN 354, EN 355 and EN 362

MAKE IN INDIA

02

Marine Safety & Accessories

Fire-fighting, life-saving, navigation and deck equipment for vessels, ports and offshore sites.

- Fire Fighting — Hoses, Hydrant Valves, Couplings & Nozzles
- Navigation & Signalling — Binoculars, Compasses, Clocks & Buoys
- Life Saving — Life Rings, Jackets, Liferafts & Immersion Suits
- Emergency — First Aid, Eye Wash, EEBD & Breathing Apparatus
- Deck & Engine — Pumps, Valves, Anchors, Propellers & Steering
- Rescue — Stretchers, Pilot Ladders, Inflatable Boats & Lockout Kits

Marine Saftey and Accesories

Page No - 01



Fire Hose

Available in
India, China, Germany

Size: 1 1/2", 2", 2 1/2", 3"



Hydrant Valves

Size: 1 1/2", 2", 2 1/2", 3"



Hose Coupling


Size: 1 1/2", 2", 2 1/2", 3"



Nozzles



Adapteers and Blankcaps

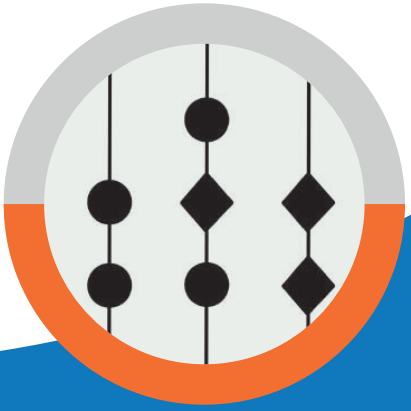

Day Signals

Marine Saftey and Accesories

Page No - 02



Solo Products



Binoculars



Heat Plate 440v



Wind Socks



First Aid Kit



Life ring and Jackets



Oil, Universe and Chemical Spill Kit



Personnel Transfer Bucket



Helicopter Crash Kit

Marine Saftey and Accesories

Page No - 03



Eye Shower and Station



Eye Wash First Aid Kit



Smoke Detecters



Immersion Suit



Emergency Escape Breathing Device(EEBD)



Breathing Apparatus



Marker Buoy



Fireman Suites



Damage Control Kit

Marine Saftey and Accesories

Page No - 04



Hand Operated Siren



Boat Hook



Marine Clocks



Lifeguard Umbrella



Barometer



Floating Line with Hook



Marine Compass



Marine Pumps



Bilge Pumps

Marine Saftey and Accesories

Page No - 05



Scupper Plugs



Anchors



Fireman Helmet



Explossion Hand Lamp



Liferaft



ALDIS Lamp with Battery



Float Switches



Marine Hydraulic Steering System




Propeller

Marine Saftey and Accesories

Page No - 06



Lifebuoy Bracket

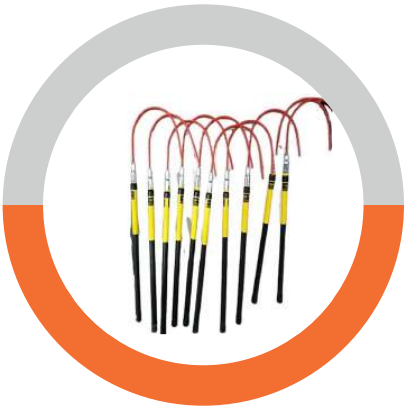

Rescue Stick with Pole



Personnel protective Equipments



Inflatable Boats



Pilot Ladder



Life Floats



Fire Estinguisher Inspection Tag and Seal



Marine Valves



Marine Search Light

Marine Saftey and Accesories

Page No - 07



Monkey Fist



Med approved Fire estinguisher for Marine



Folding Stretcher




Rescue Torpedo Buoy



Solar Navigation Lights



Paraguard Stretcher

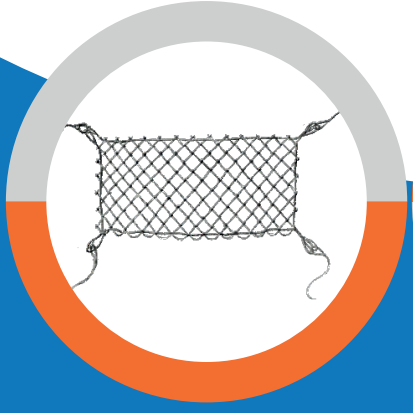

Gangway Net



Megaphones



Spill Deck Pallets
1drum, 2drum, 4drum, 8drum

Marine Saftey and Accesories

Page No - 08



Lockout Kits




Foam Trolley



Lifejacket Light



Basket Stretcher

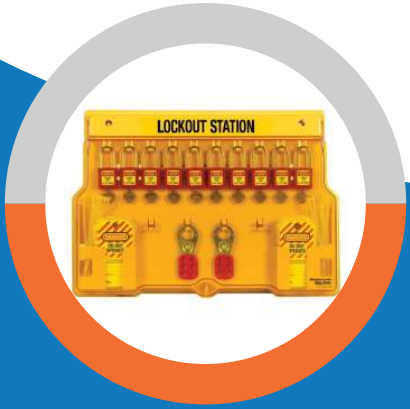

Lockout Station



Steering Wheels



Lifebouy Light

MARINE VALVES

RELIABLE FLOW CONTROL
FOR MARINE APPLICATIONS

SHIPBUILDING | MARINE ENGINEERING | OFFSHORE APPLICATIONS | CORROSION RESISTANT



MARINE FITTINGS

RELIABLE FITTINGS FOR
MARINE & OFFSHORE APPLICATIONS



SHIPBUILDING | MARINE ENGINEERING | OFFSHORE APPLICATIONS | CORROSION RESISTANT





ELBOWS




TEES



COUPLINGS



REDUCERS



BENDS



FLANGES



UNIONS



NIPPLES



PLUGS & CAPS



HOSE FITTINGS



PIPE FITTINGS



THREADED FITTINGS



WELDING FITTINGS



BUSHINGS



PIPE CLAMPS & SUPPORTS

HIGH QUALITY MATERIALS | DURABLE & LONG LASTING | SUITABLE FOR MARINE ENVIRONMENTS | WIDE RANGE OF SIZES

SAACO GENERAL TRADING

PRODUCT CATALOGUE

03

Packaging Materials

Industrial packaging and protective materials for storage, shipping and site use.


- PP Strap, Tarpaulin & Adhesive Tapes
- Corrugated Paper Roll & PVC Corrugated Sheet
- Bubble Wrap & Stretch Film

Packaging Materials

Page No - 09



PP Strap



Tarpaulin



Adhesive Tapes



Corrugated Paper Roll



PVC Corrugated Sheet



Bubble wrap



Stretch Film

Get In Touch With Us



Phone
+966 55 215 1564
+966 59 024 6464

Website
www.saaco.info

Mail
sales@saaco.info
it@saaco.info

Location
Jeddah, Riyadh, Dammam

sales@saaco.info | www.saaco.info